

SIRIO 2000 series

CB Base Station Antennas

DESCRIPTION

Hi-quality base station antennas working on 27 MHz. They are made of anti-corodal aluminium tubes and supplied with polythene jointing sleeves to guarantee a perfect waterproofing. Strong and easy to install, they allow very good links.

SPECIFICATIONS


Electrical Data

Type	: 5/8 Ground Plane
Frequency range	: 26.4...28.2 MHz tunable (see table)
Impedance	: 50
Radiation (H-plane)	: 360° omnidirectional
Polarization	: Linear Vertical
Gain	: 1.3 dBd, 3.45 dBi
Bandwidth @ SWR 2	
SIRIO 2008, SIRIO 2012	: 1750 KHz (160 channel)
SIRIO 2016	: 2100 KHz (200 channel)
SWR @ res. freq.	: 1.1
Max Power	: 1000 Watts (CW) continuous
	: 3000 Watts (CW) short time
Feed system/ position	: Transformer DC-ground / base
Connector	: UHF-female


Mechanical Data

Materials	: Aluminium, Copper, Nylon
	: Brass, Galvanized Steel
Wind Load / Resistance	: 166 N @ 150Km/h / 130 Km/h
Wind surface	: 0.14 m ²
Length (approx.)	: 6100 mm
Weigth (approx.)	: 5300 gr
Radial lenght	
SIRIO 2008, SIRIO 2012	: 1320 mm
SIRIO 2016	: 700 mm
Mounting Mast	: 40-50 mm


TYPICAL S.W.R. RESPONSE

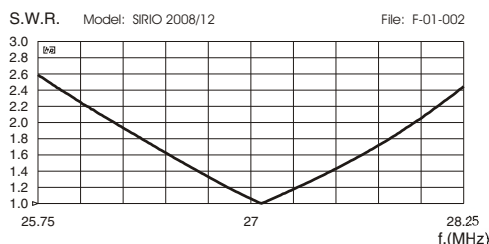

TYPICAL S.W.R. RESPONSE

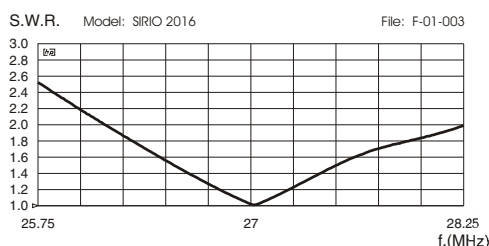


HIGH POWER IMPEDANCE TRANSFORMER

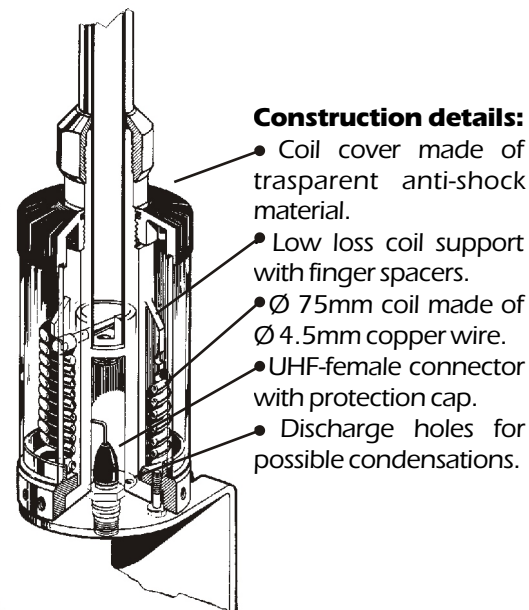

SIRIO 2000 series features:

SIRIO 2008 : with 8 G.P. radials lenght=1320mm
 SIRIO 2012 : with 12 G.P. radials lenght=1320mm
 SIRIO 2016 : with 16 G.P. radials lenght= 700 mm

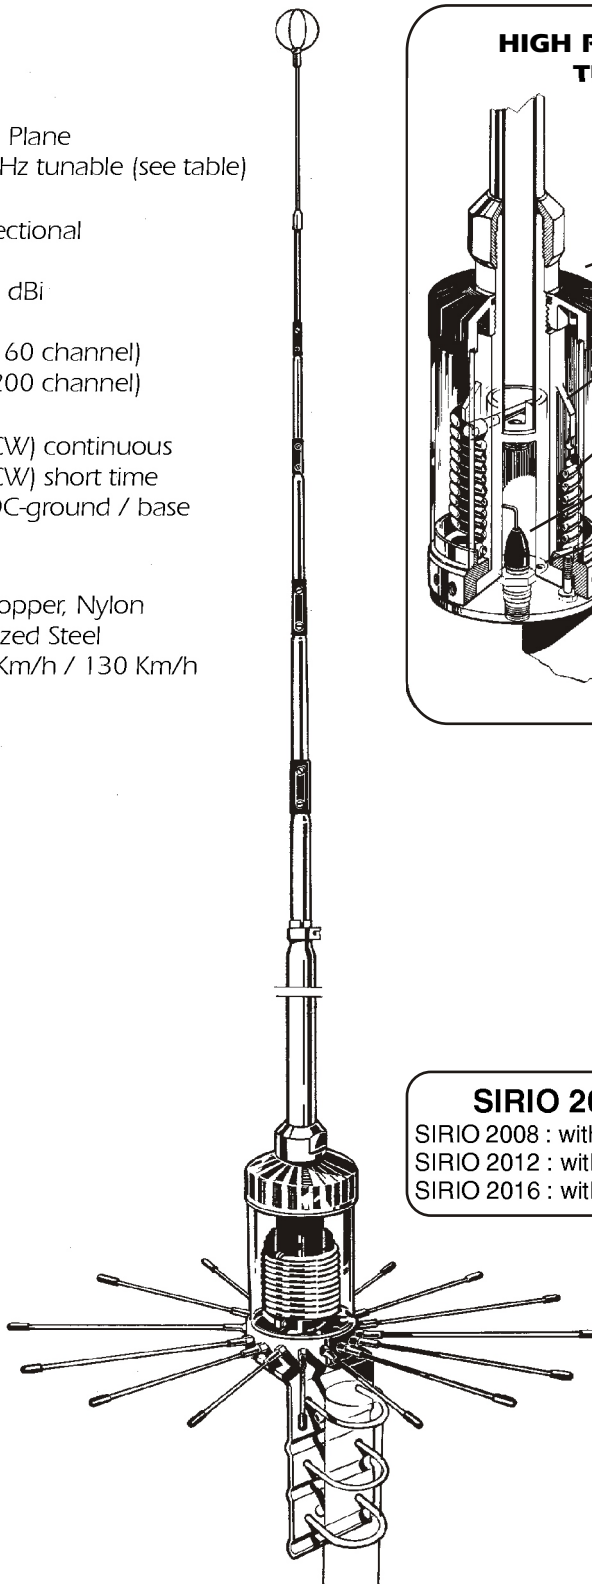

SIRIO
antenne

HI-QUALITY ANTENNAS MADE IN ITALY





TUNING TABLE	
Freq. (MHz)	L (mm)
26.4	545
27.0	381
(Ch.19 CB) 27.185	330
27.5	241
28.0	101
28.2	45

Mounting needed tools:

- n. 1 tape rules (meter)
- n. 1 phillips screwdriver
- n. 1 8 mm open key
- n. 1 10 mm open key
- n. 1 13 mm open key

Parts List		
Pos	Q.ty	Description
1	1	5 sections telescopic aluminium whip
2	4	plastic jointing sleeves (4 different sizes)
3	8	3.9x6.5 mm phillips tapping screws
4	1	top section with cage
5	1	M4x4 hexagon socket set screw cup point
6	1	2 mm hexagonal key
7	1	Bottom section assembled with coil and connector
8	6	M8 washers
9	6	M8 spring lock washers
10	6	M8 hexagonal nuts
11	3	M8x200 mm U-bolts
12	1	26-28 mm hose clamps
13	8/12 16	6x8x1320mm radials aluminium tubes with joint (SIRIO 2008/12) 6x8x700mm radials aluminium tubes with joint (SIRIO 2016)
14	8/12/16	PVC cap for 8mm aluminium tubes (models dependent)

MOUNTING INSTRUCTIONS

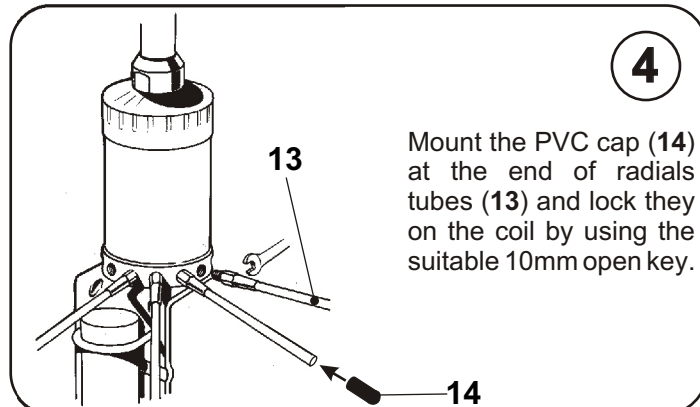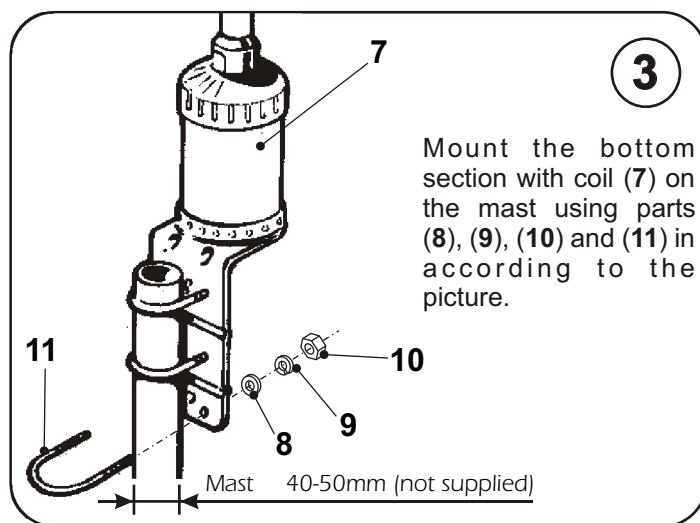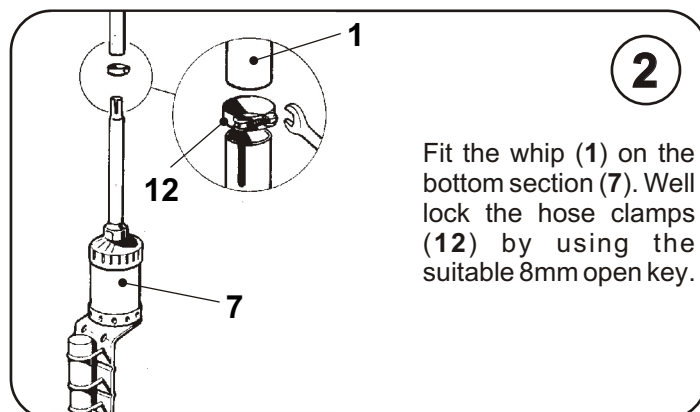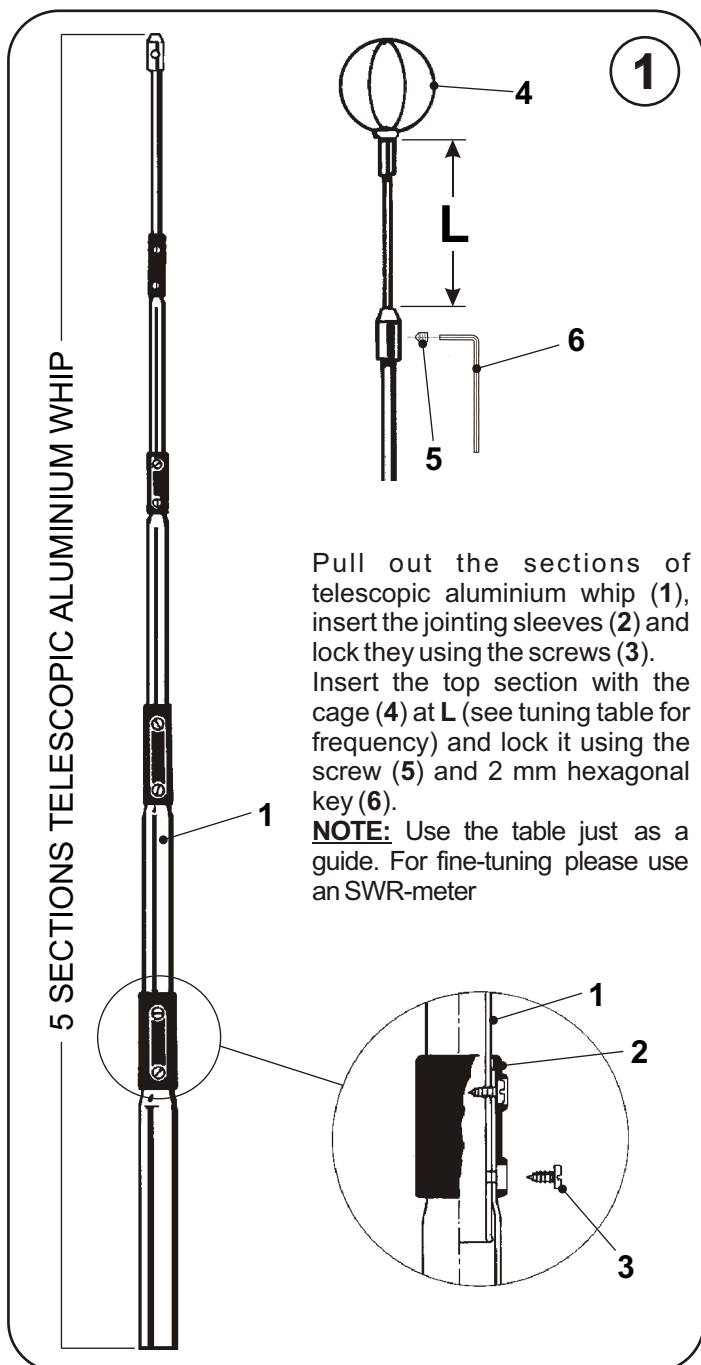

SIRIO
antenne

HI-QUALITY ANTENNAS MADE IN ITALY