

DYNAMIC MICROPHONE

MH-31A8J

Technical Supplement

©2003 VERTEX STANDARD CO., LTD. Printed in Japan.

E068790A

VERTEX STANDARD CO., LTD.

4-8-8 Nakameguro, Meguro-Ku, Tokyo 153-8644, Japan

VERTEX STANDARD

US Headquarters

10900 Walker Street, Cypress, CA 90630, U.S.A.

International Division

8350 N.W. 52nd Terrace, Suite 201, Miami, FL 33166, U.S.A.

YAESU EUROPE B.V.

P.O. Box 75525, 1118 ZN Schiphol, The Netherlands

YAESU UK LTD.


Unit 12, Sun Valley Business Park, Winnall Close

Winchester, Hampshire, SO23 0LB, U.K.

VERTEX STANDARD HK LTD.

Unit 5, 20/F., Seaview Centre, 139-141 Hoi Bun Road,

Kwun Tong, Kowloon, Hong Kong

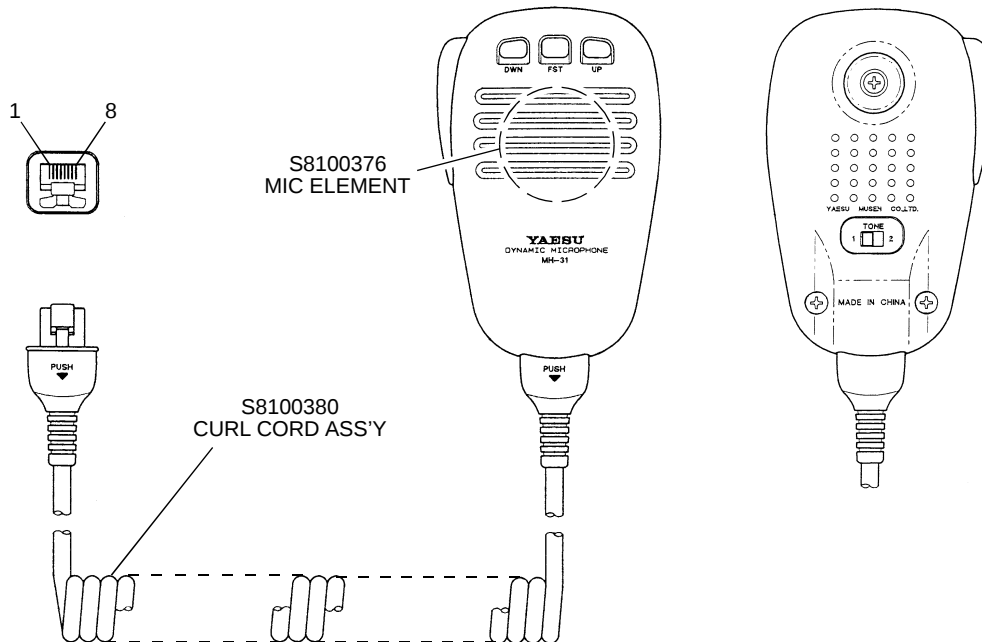

Specifications

Microphone Type:	Dynamic
Microphone Impedance:	190-ohm $\pm 30\%$ at 1 kHz (tone 1)
Microphone Sensitivity:	-78 dB ± 3 dB at 1 kHz, 0 dB = 1 V / 0.1 Pa (tone 1)
Audio Tone Response:	tone1, full range tone2, -14 dB ± 3 dB at 100 Hz
Weight (approx.):	183 g.

Circuit Diagram

